



FC72327
PAINT COLOR: XN1002P2001VXX
#31018AP2001VXX
#10 X 2" THE ANSWER RDP WOODSCREW
W/ SS WASHER (250/BAG) / NY
EVERLAST
Roofing, Inc.
MADE IN THE USA

THE ANSWER

RDP Woodscrew

Advantages

- Non-conductive EPDM bonded to a stainless steel washer
- 40 Year Warranty
- #10 Hi-Lo Threads
- 1/4" Hex Head
- 250 per bag

Installation & Application Considerations


- Use of impact guns is not recommended
- Special care needs to be taken when installing #10 The Answer RDP woodscrew into wood substrate less than 1" thickness. Stripping the fastener out during installation can affect the performance of the fastener.

Everlast
Roofing, Inc.

OUR NAME SAYS IT ALL

EVERLASTROOFING.COM

THE ANSWER

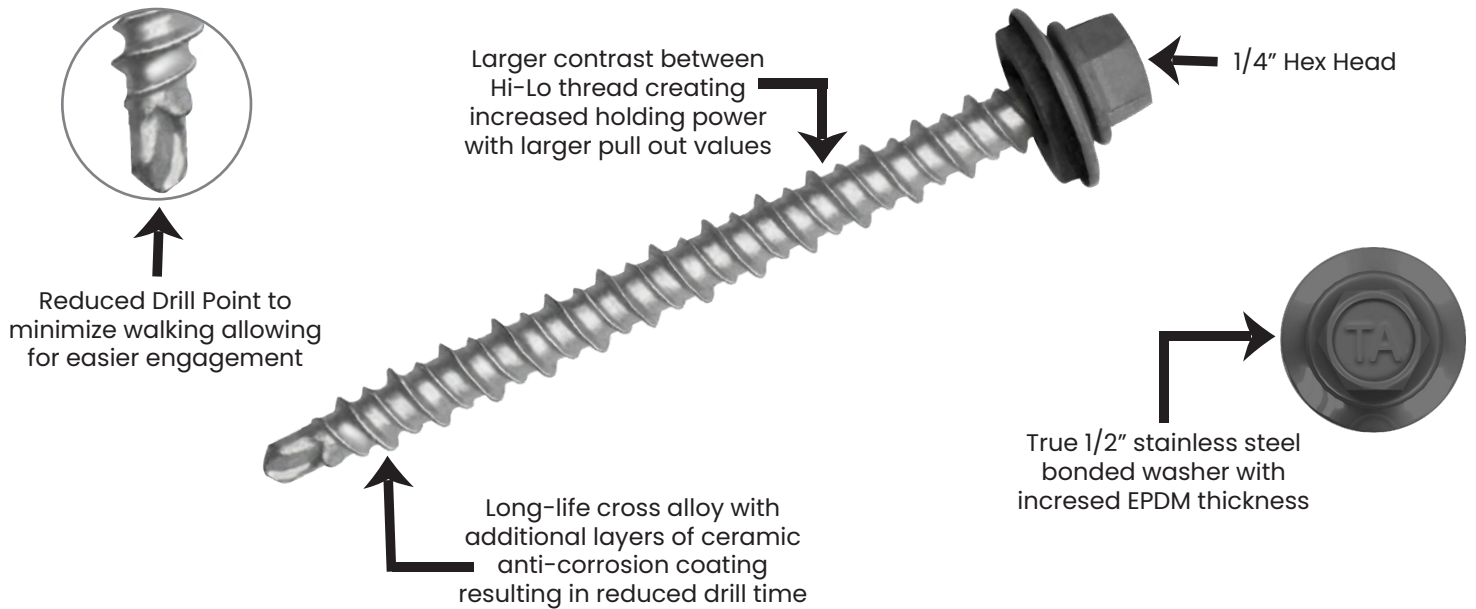

Standard Specifications

- RDP (Reduced Drill Point) Screw
- 40 Year Warranty
- Cross alloy mechanical plating
- Non-conductive EPDM bonded to a stainless steel washer
- #10 Hi-Lo Threads
- 1/4" Hex Head
- Extra UV resistant pigmentation
- 250 per bag

Description

Everlast Roofing eliminates the many challenges of finding the appropriate screw that will perform at the same quality level as an Everlast product. The Answer RDP Woodscrew, developed to offer a long-life solution over standard fasteners, is available in 20 colors to match our color palette. This fastener comes with a 40 year warranty and in-stock availability.

	Shear (avg. lbs. ult.)	Tensile (avg. lbs.)	Torsional (min. in. lbs.)
	1386	2310	86

	Substrate	Penetration	Pull Out Strength
Pull Out Strength ¹	3/4" OSB	Full	613 lbf
	19/32" Plywood	1 1/2"	925 lbf
	3/4" Plywood	Full	356 lbf
	2x Yellow Pine	1/2"	818 lbf

	Substrate	Gauge	Thickness	Pull Over Strength
Pull Over Strength ²	AZ55 Galvalume	29	.014	370 lbf
	AZ55 Galvalume	26	.018	475 lbf
	AZ55 Galvalume	24	.024	660 lbf

AISI S905-13 Test Standard

¹ Pull out strength may vary from tested loads depending upon specific wood density variations
² Pull over strength values are based on metal panel ksi values: 29 ga. (56 ksi), 26 ga. (53 ksi), 24 ga. (56ksi)

DISCLAIMER: All information is non-binding and without guarantee. Before using the products, a suitably qualified person must check all specifications and calculations, and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes.

Item Code	Description	Length	Pcs/Box	Lbs/Box
FS10TARDP100xx	#10 Woodscrew	1"	3,000	25.92
FS10TARDP150xx	#10 Woodscrew	1 1/2"	2,500	27.30
FS10TARDP200xx	#10 Woodscrew	2"	2,000	26.48
FS10TARDP250xx	#10 Woodscrew	2 1/2"	1,500	23.24
FS10TARDP300xx	#10 Woodscrew	3"	1,000	17.88

LEBANON, PA
888.339.0059

ORWELL, OH
877.866.9955

HOWE, IN
866.562.3782

BRIDGTON, ME
800.677.2060